



Thimble 70 Trimless LED GE

116220XX\_116221XX



1




Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	14,8	18,0	5,7
500	15,2	18,6	8,5
⊕ RED		⊖ BLACK	

For serial connection, respect polarity!  
Not suited for connection to mains voltage.  
Combine with a Modular LED-driver.



2

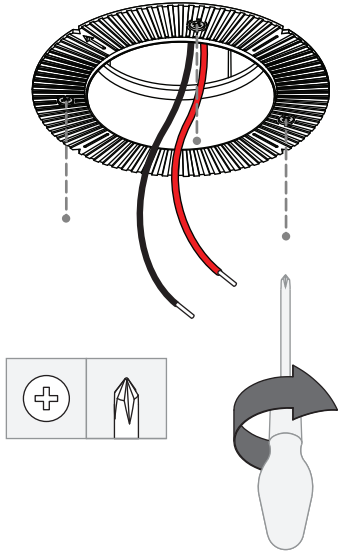




3

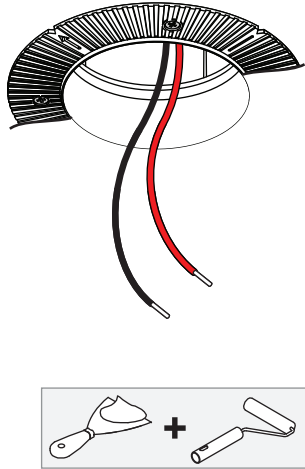



4

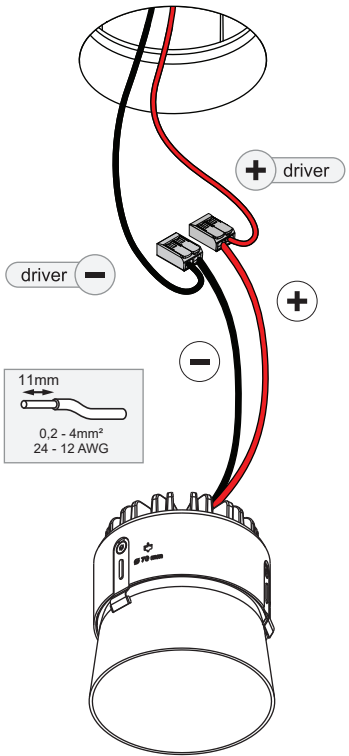

5



Accessory not included  
For detailed information check  
corresponding installation instruction.

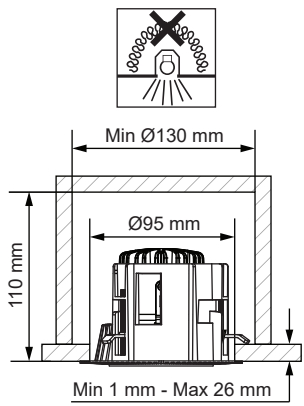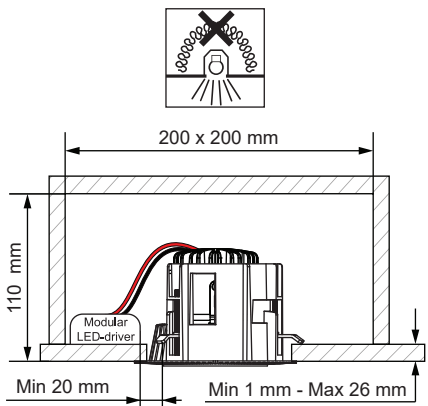

Replace protective shield when broken.  
The luminaire shall only be used complete  
with its protective shield.  
Reference number: 1013583

**LIGHT SOURCE - DO NOT TOUCH LED**  
Touching the LED can result in permanent  
damage of the light source. The light source  
contained in this luminaire shall only be  
replaced by the manufacturer or his service  
agent or a similar qualified person.

**PREVENTING ELECTROSTATIC DAMAGE**  
A discharge of static electricity may  
damage sensitive components. Always be  
properly grounded when touching leads or  
circuitry inside the luminaire. Use a wrist  
strap connected by a ground cord to the  
housing. Avoid touching the light sources  
with bare hands.

**DRIVERS & ACCESSORIES**  
For latest version of driver matrix and available  
accessories check [www.supermodular.com](http://www.supermodular.com) or  
connect with your sales contact.