



Thimble 70 Trimless Adjustable LED GE

116230XX_116231XX


1




Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	14,8	18,0	5,7
500	15,2	18,6	8,5
⊕ RED		⊖ BLACK	

For serial connection, respect polarity!
Not suited for connection to mains voltage.
Combine with a Modular LED-driver.



2

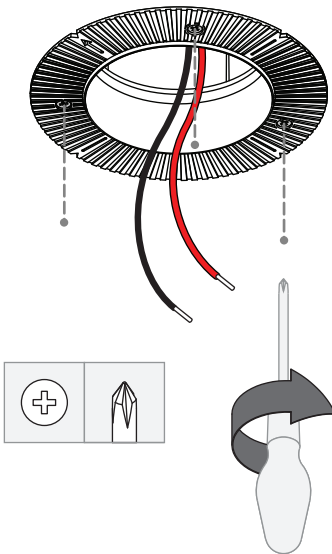




3

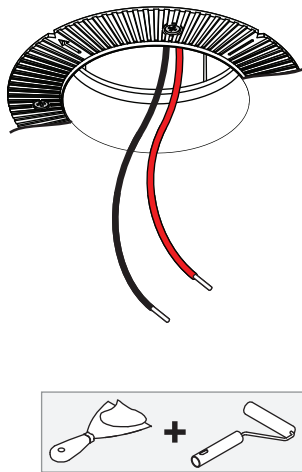



4

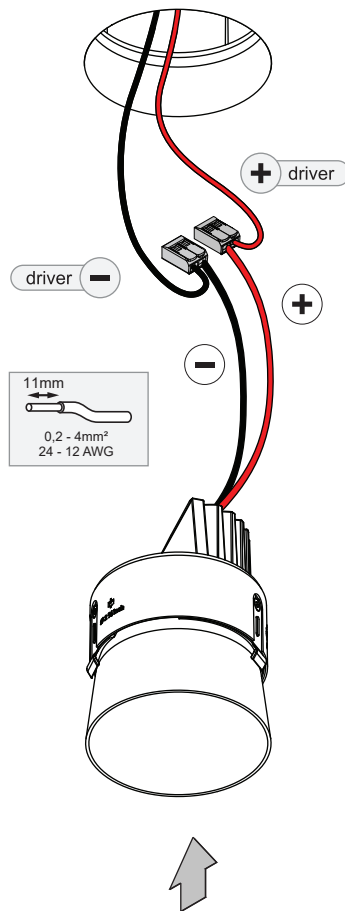

5



Accessory not included
For detailed information check
corresponding installation instruction.

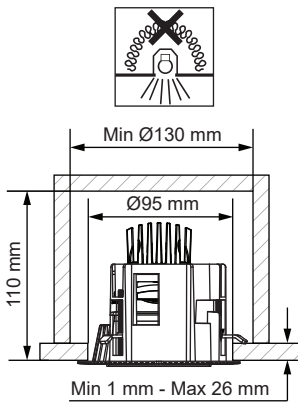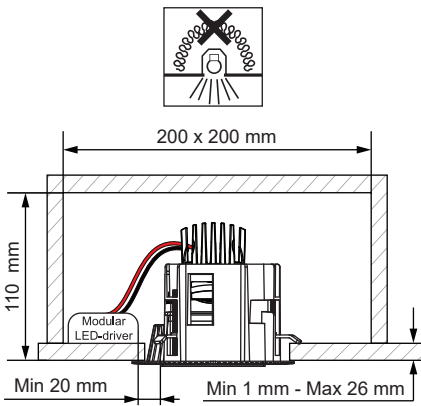

Replace protective shield when broken.
The luminaire shall only be used complete
with its protective shield.
Reference number: 1013583



LIGHT SOURCE - DO NOT TOUCH LED
Touching the LED can result in permanent
damage of the light source. The light source
contained in this luminaire shall only be
replaced by the manufacturer or his service
agent or a similar qualified person.



PREVENTING ELECTROSTATIC DAMAGE
A discharge of static electricity may
damage sensitive components. Always be
properly grounded when touching leads or
circuitry inside the luminaire. Use a wrist
strap connected by a ground cord to the
housing. Avoid touching the light sources
with bare hands.

DRIVERS & ACCESSORIES

For latest version of driver matrix and available
accessories check www.supermodular.com or
connect with your sales contact.