



WEVER & DUCRÉ
LIGHTING

TRAIN WALL OUTDOOR 2.0

718968B5

Project

Type

Notes

Quantity

Date

GENERAL

Wall

Surface

Jet Black

IP65

Exterior

Total 510 lm

RAL 9005 ^a

LED

3000 K

3-step binning

PHYSICAL

Length 50 mm

Width 50 mm

Height 120 mm

0.35 kg

ELECTRICAL

phase-cut dim




220 - 240 V

Total connected power 8 W

Class 1

Safety distance 0.3 m

^a Color may deviate slightly due to production conditions.

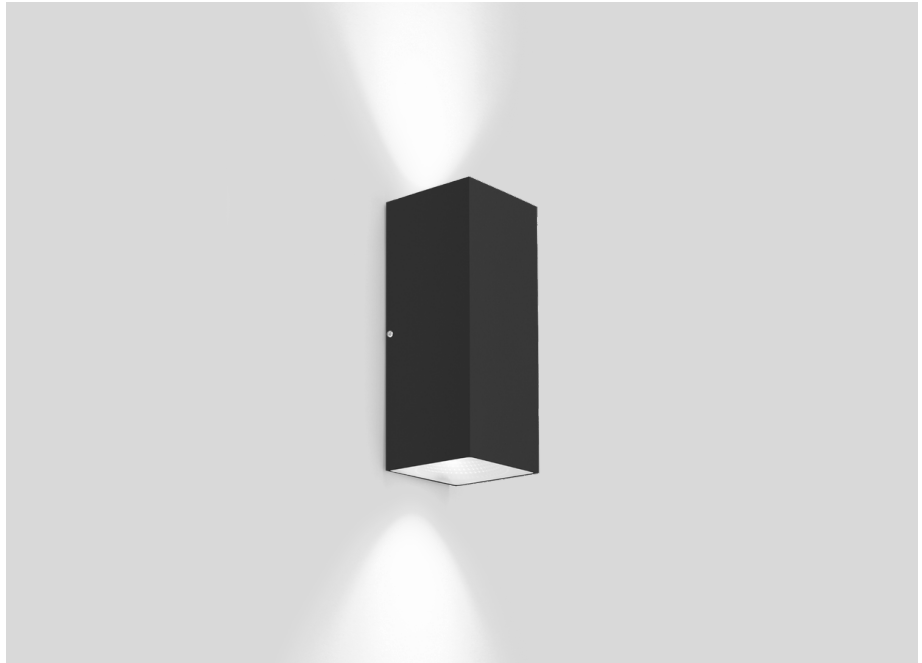



WEVER & DUCRÉ
LIGHTING

TRAIN WALL OUTDOOR 2.0

718968B5

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.95	0.9	0.84	0.79	0.75
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.